


STEPPING MOTOR SRQ08 SERIES

Application

Precision Instruments
CCTV

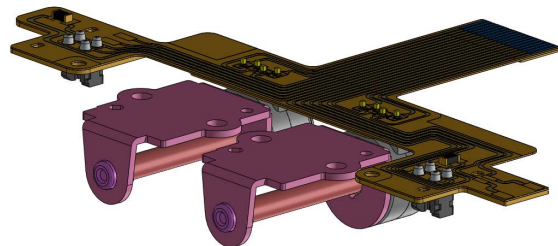

	VOLTAGE		CURRENT	FRTEQUENCY	LENGTH	STEP ANGLE	PHASE	DRIVE MODE	MASS
MODEL	OPERATING RANGE	NOMINAL	A	MAX.STARTING FRTEQUENC(PPS)	5.75mm	9°	2-2	BI-POLAR	5.1g
21SRQ0805002	4.0V~6.0V	5.0V	0.179/Phase	1200					

Specification 21SRQ0805002

NO	Function
18	FOCUS A-
17	FOCUS B
16	FOCUS A
15	FOCUS B-
14	IR-
13	IR+
12	PI(Emitter,Cathode)
11	PI(Collector)
10	PI(Anode)
9	PI(Anode)
8	PI(Emitter,Cathode)
7	PI(Collector)
6	Thermistor
5	Thermistor
4	ZOOM A-
3	ZOOM B
2	ZOOM A
1	ZOOM B-

